

Bayblend[®] T45, T65, T85

- **(PC+ABS) blends**
- **Non-reinforced**
- **General-purpose injection molding grades**

Product description

Bayblend[®] T45, T65 and T85 are non-reinforced, amorphous thermoplastic polymer blends based on polycarbonate (PC) and acrylonitrile butadiene styrene (ABS). They are noted for their ideal combination of toughness, rigidity and flowability.

Their heat resistance to Vicat VST/B 120 is between 112 and 131 °C.

Characterisation

Bayblend[®] T45, T65 and T85 are the successor products to the general-purpose Bayblend[®] grades T44, T64, T84 ("4" series) and T45 MN, T65 MN, T85 MN ("MN" series). They combine the advantages of the "4" series (very good flowability) and those of the "MN" series (very good toughness, even at low temperatures) in an ideal manner. Alongside improved flowability, T45, T65 and T85 also display greater rigidity and weathering resistance than the individual MN grades.

Delivery form

The products are supplied as oval or cylindrically cut granules in 25-kg polyethylene sacks, in large cartons with a polyethylene inliner or in bulk.

Bayblend[®] T45, T65 and T85 are available in their natural color or in a large number of opaque color shades.

The production plants for Bayblend[®] in Europe and those in Asia have been certified to DIN EN ISO 9001:2000 by the DQS (DQS = German Association for the Certification of Quality Systems, Berlin).

Applications

- **Automotive:**
Instrument panels, exterior mirror housings, ventilation systems, emblems, side protection moldings, grilles, glove compartment lids, interior mirror housings, instrument frames, loudspeaker covers, steering column trims, central consoles, wheel covers, rear light chassis, column trims, headlamp housings, spoilers, door sills.
- **Data systems engineering:**
Mobile telephone housings.
- **Electrical/electronics industries:**
Sockets, switches, covers.
- **Household:**
Top sections of irons, hairdryers, coffee machines, shaver housings, time-switch housings.

Properties

Bayblend[®] T45, T65 and T85 are noted for their favourable combination of heat resistance, toughness, rigidity and flowability.

Mechanical properties

T45, T65 and T85 display a very high impact and notched impact strength over a broad range of temperatures. The excellent low-temperature toughness of these products is even more pronounced with T65 and T85 than with T45. The property values from the tensile test increase slightly from T45 through T65 to T85.

Thermal properties

Bayblend[®] grades T45, T65 and T85 differ primarily in terms of their heat resistance. T45 covers the

lower end of the heat-resistance range with a Vicat temperature of 112 °C while T65 covers the middle of the range at 120 °C and T85 the upper end of the range at 131 °C.

The melting range begins at approx. 200 °C, with thermal decomposition setting in at approx. 300 °C.

The linear coefficient of thermal expansion only correlates to a small extent with the melt flow direction and is in the range 0.75 to $0.90 \times 10^{-4}/K$.

Rheological properties

Flowability decreases in the order T45 → T65 → T85 (see flow path/wall thickness diagrams page 4 + 5).

The melt volume-flow rate (MVR) is identical for all three products and is thus not suitable for assessing the flow behavior of Bayblend®.

The favorable combination of very good flowability and sound mechanical properties means that Bayblend® grades T45, T65 and T85 are also frequently used for the thin-wall technique.

Resistance to chemicals

At room temperature, molded parts in Bayblend® are resistant to mineral acids, a large number of organic acids and also aqueous saline solutions. Bayblend® parts are not resistant to bases, aromatics, ketones, esters, chlorinated hydrocarbons and a number of greases and oils. Their resistance to chemicals is conditioned inter alia by the temperature, loading duration and the internal and external stress status of the molded part.

Resistance to light aging and weathering

As with most thermoplastics, light aging and weathering leads to color changes and to an impairment of the mechanical properties. This reduction in properties, however, is not so pronounced, and the release specifications of the automotive industry for interior parts, for example, can still be met. Painting is recommended for parts that are required to satisfy stringent demands.

Processing

Processing is generally by injection molding, but extrusion and extrusion blow molding are also possible.

Pre-treatment/drying

It is essential for Bayblend® to be dried prior to processing. For injection molding, there must be less than 0.02 % residual moisture in the granules. Moisture in the plastic melt can lead to surface defects in the form of streaks and also to hydrolytic degradation (reduction in mechanical properties).

Drying conditions:

T45: 2-4 h at 100 °C (dry-air dryer)

T65 and T85: 2-4 h at 110 °C (dry-air dryer)

Drying is best conducted in dry-air dryers.

Excessively long drying times should be avoided, since color changes cannot otherwise be ruled out.

Melt temperature¹: 240 to 280 °C

The optimum processing temperature must be established as a function of the molded part.

Overheating, and also excessively long residence times for the melt in the barrel must be avoided, since this can lead to material damage, i.e. to a reduction in toughness, or to surface defects in the form of streaks on the injection-molded part.

¹Under the recommended processing conditions small quantities of decomposition product may be given off during processing. To preclude any risk to the health and well-being of the machine operatives, tolerance limits for the work environment must be ensured by the provision of efficient exhaust ventilation and fresh air at the workplace in accordance with the Safety Data Sheet.

In order to prevent the partial decomposition of the polymer and the generation of volatile decomposition products, the prescribed processing temperatures should not be substantially exceeded. Since excessively high temperatures are generally the result of operator error or defects in the heating system, special care and controls are essential in these areas.

Mold temperature: 70 to 100 °C.

With a uniform mold temperature, this is the optimum temperature range for the production of low-stress parts with a very good surface quality.

While low temperatures permit shorter cycle times, they lead to poorer molded part qualities. The level of orientation, inherent stress and post-shrinkage increases, while the surface quality deteriorates.

Screw speed

The screw speed should be controlled in such a way that the circumferential velocity of the screw is between 0.05 and 0.2 m/s.

Shrinkage

Molding shrinkage is virtually identical in all axes, in between a range of 0.55 to 0.75 %. In addition to the geometry of the part, shrinkage is primarily dependent on the level of holding pressure and the time for which this acts, as well as on the temperature of the melt and the mold and on the cooling conditions prevailing in the mold.

Finishing

- Machining:
sawing, drilling, milling, turning, planing, filing, stamping
- Joining:
screwed connections, gluing, welding
- Post-treatment:
painting, printing, foam-coating, metallisation laser inscription

Recycling

Single-sort moldings in Bayblend® T45, T65, and T85 which do not contain any harmful substances can be mechanically recycled after use. Molded parts containing harmful substances can be chemically or thermally recycled.

Parts should be marked in accordance with DIN ISO 11469. The identification mark for parts made of Bayblend® T45, T65 and T85 is as follows:







>PC+ABS<

Further details may be found in our Technical Information TI KU21164en.

Further literature on the subject:

Brochure: "Bayblend® - Properties and Processing",
Order no.: KU13002 e.

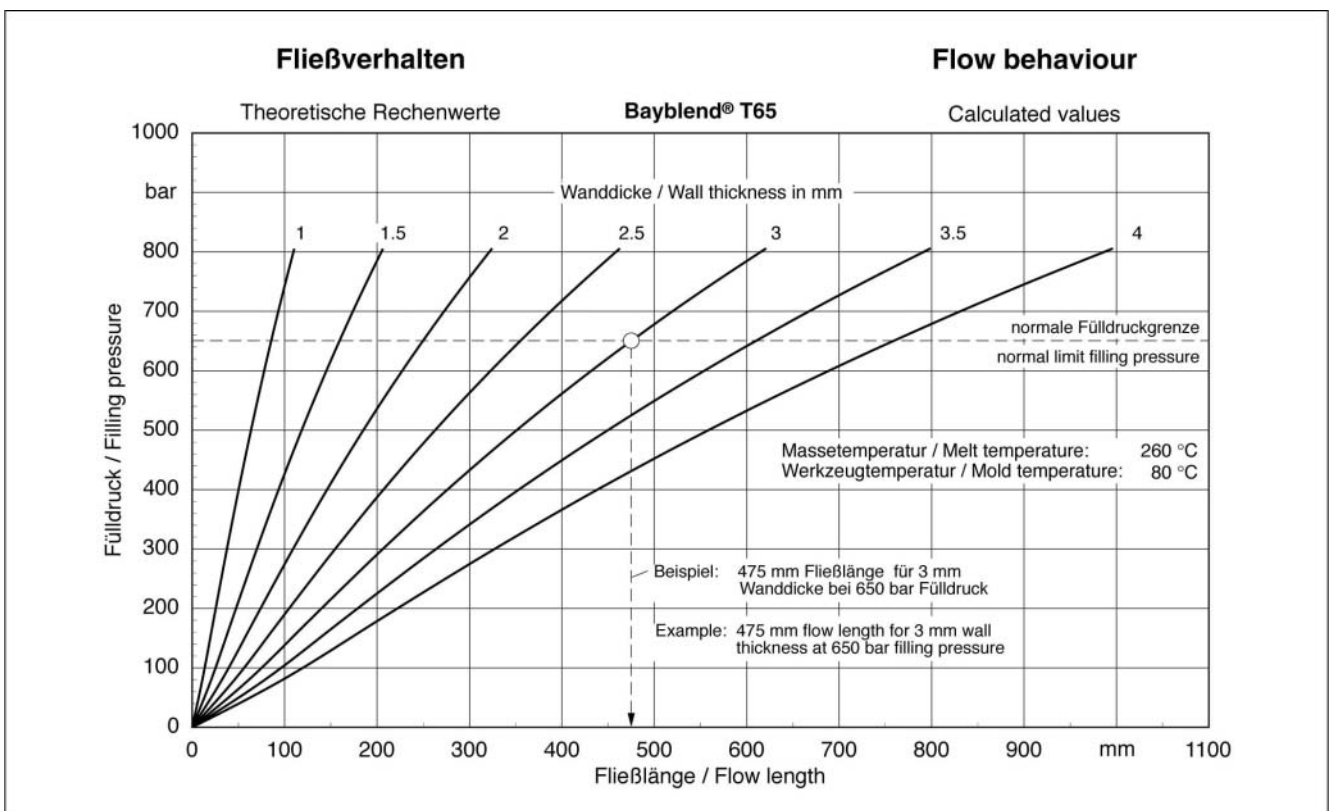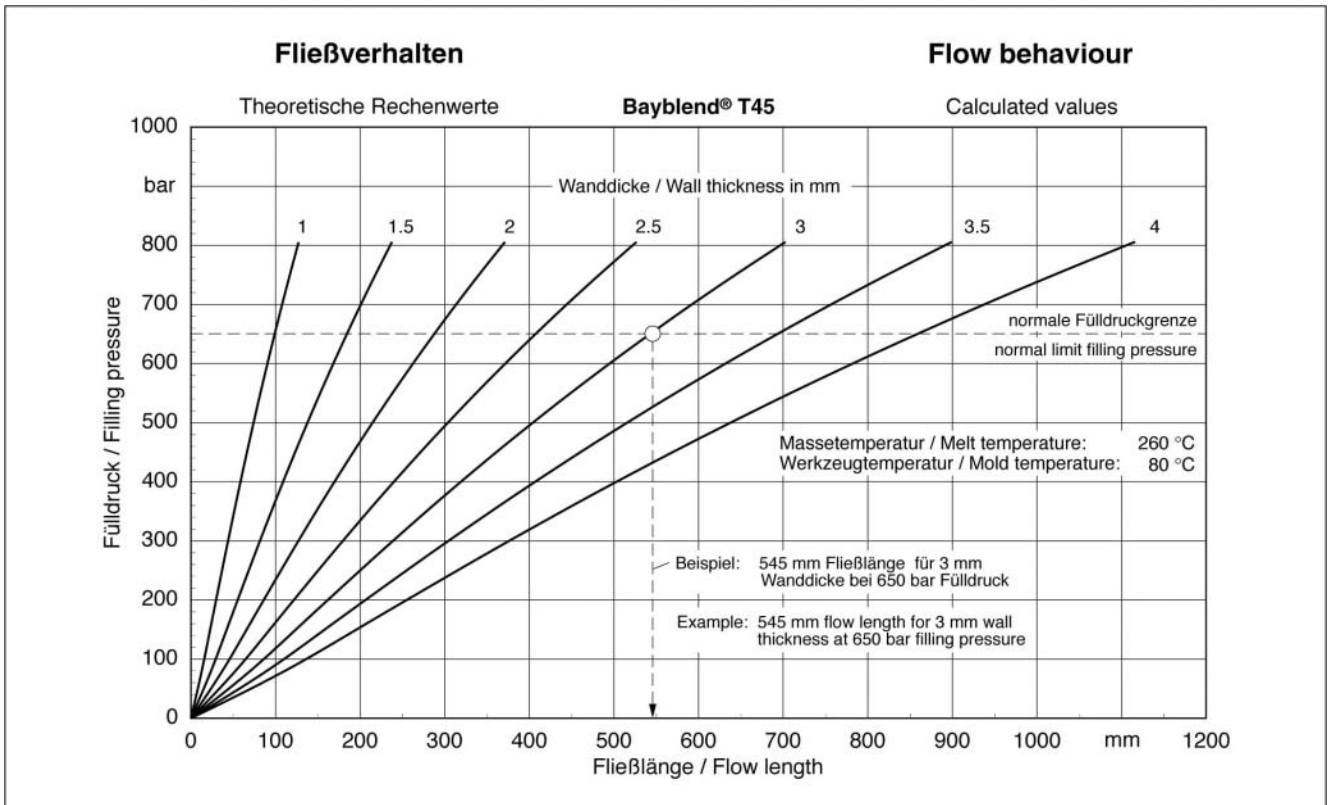

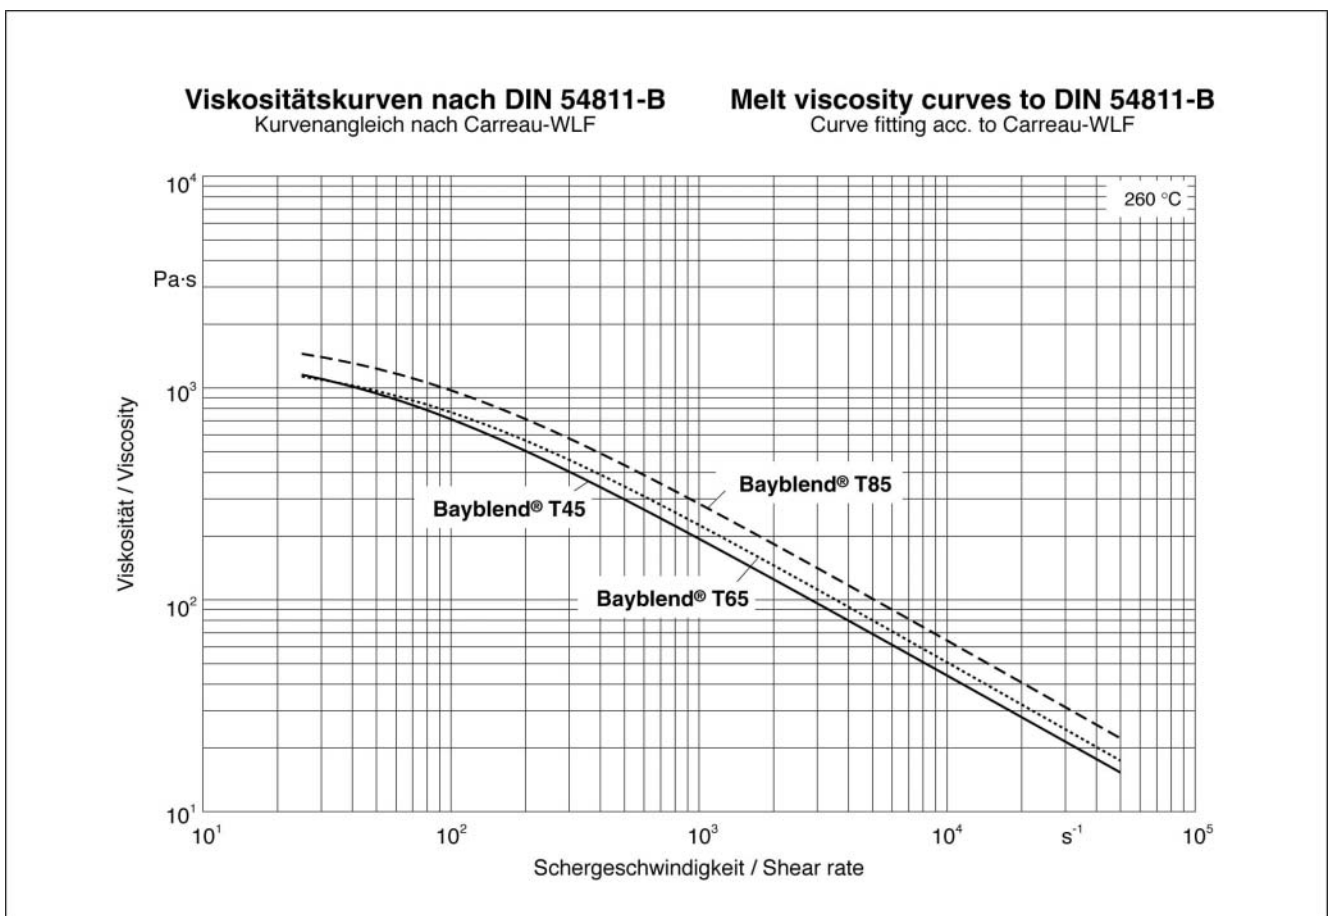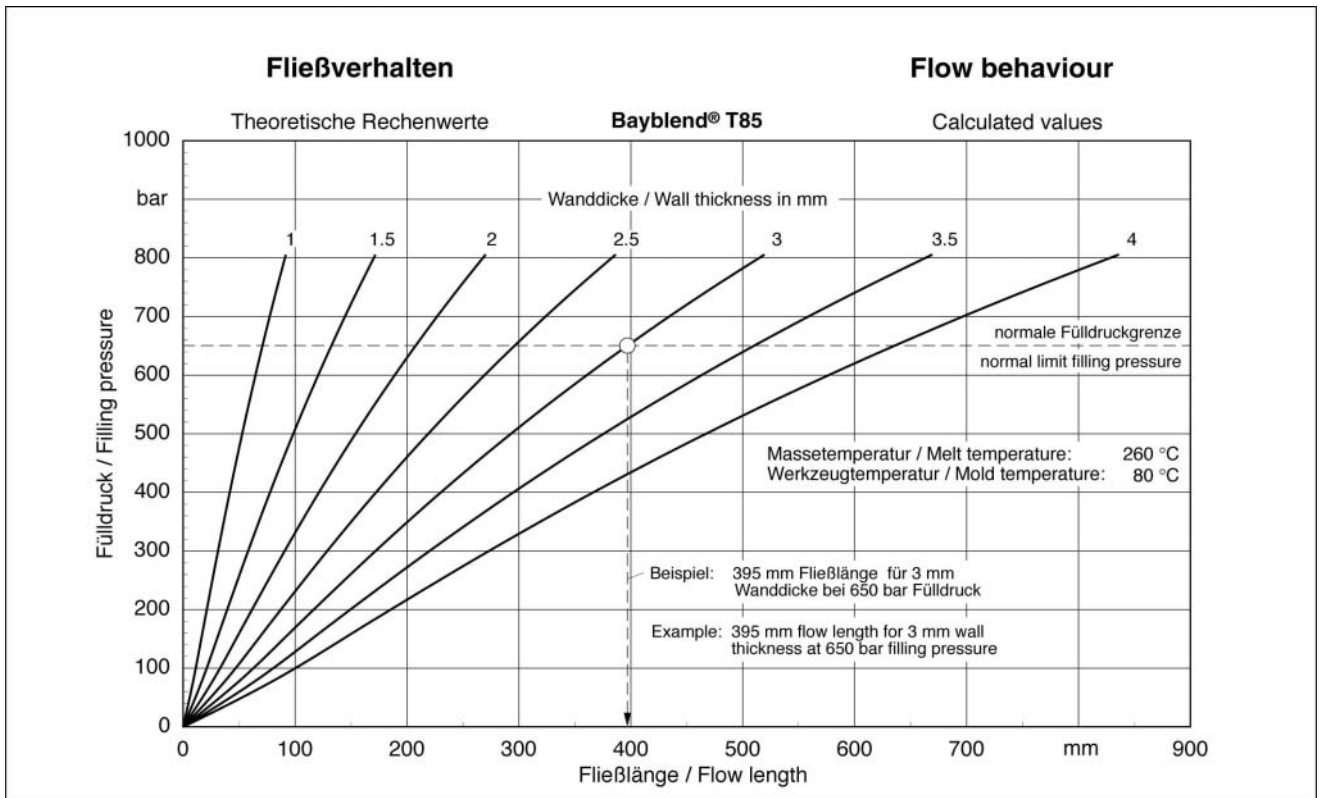

Reference Data

Typical Properties	Test Conditions	Units	Standards	Bayblend®		
				T45	T65	T85

Rheological properties

Spiral flow length	260 °C; 2 x 8.7 mm	mm	Bayer test	450	410	345
C Melt volume-flow rate (MVR)	260 °C; 5 kg	cm ³ /(10 min)	ISO 1133	12	12	12
Molding shrinkage, parallel	150x105x3; 260 °C /	%	based on ISO 2577	0.55 - 0.75	0.55 - 0.75	0.55 - 0.75
Molding shrinkage, normal	150x105x3; 260 °C / MT 80 °C; 500 bar	%	based on ISO 2577	0.55 - 0.75	0.55 - 0.75	0.55 - 0.75

Mechanical properties (23 °C/50 % r. h.)

C Tensile modulus	1 mm/min	MPa	ISO 527-1,-2	2100	2200	2300
C Yield stress	50 mm/min	MPa	ISO 527-1,-2	49	52	55
C Yield strain	50 mm/min	%	ISO 527-1,-2	3.7	4.2	4.7
Stress at break	50 mm/min	MPa	ISO 527-1,-2	40	45	48
Strain at break	50 mm/min	%	based on ISO 527-1,-2	> 50	> 50	> 50
Izod impact strength	23 °C	kJ/m ²	ISO 180-1U	N	N	N
Izod impact strength	-30 °C	kJ/m ²	ISO 180-1U	N	N	N
Izod notched impact strength	23 °C	kJ/m ²	ISO 180-1A	40	45	48
Izod notched impact strength	-30 °C	kJ/m ²	ISO 180-1A	36	41	38

Thermal properties

C Temperature of deflection under load, HDT, method Af	1.80 MPa	°C	ISO 75-1,-2	95	100	109
C Temperature of deflection under load, HDT, method Bf	0.45 MPa	°C	ISO 75-1,-2	112	122	127
Vicat softening temperature	50 N; 120 °C/h	°C	ISO 306	112	120	131
C Coefficient of linear thermal expansion, parallel	23 to 55 °C	10 ⁻⁴ /K	ISO 11359-1,-2	0.85	0.8	0.75
C Coefficient of linear thermal expansion, transverse	23 to 55 °C	10 ⁻⁴ /K	ISO 11359-1,-2	0.9	0.85	0.8
C Burning behavior UL 94	0.85 mm	Class	UL 94	HB	HB	HB

Electrical properties (23 °C/50 % r. h.)

C Relative permittivity	100 Hz	-	IEC 60250	3.1	3.1	3.1
C Relative permittivity	1 MHz	-	IEC 60250	3.0	3.0	3.0
C Dissipation factor	100 Hz	10 ⁻⁴	IEC 60250	35	30	20
C Dissipation factor	1 MHz	10 ⁻⁴	IEC 60250	85	85	85
C Volume resistivity		Ohm·m	IEC 60093	1E14	1E14	1E14
C Surface resistivity		Ohm	IEC 60093	1E16	1E16	1E16
C Electric strength	1 mm	kV/mm	IEC 60243-1	35	35	35
C Comparative tracking index CTI	Solution A	Rating	IEC 60112	275	250	225

Other properties (23 °C)

C Water absorption, saturation value	in water at 23 °C	%	ISO 62	0.7	0.7	0.7
C Water absorption, equilibrium value	at 23 °C; 50 % r. h.	%	ISO 62	0.2	0.2	0.2
C Density	-	kg/m ³	ISO 1183	1100	1130	1150

Processing conditions for test specimens

C Injection molding-Melt temperature	-	°C	ISO 294	260	260	260
C Injection molding-Mold temperature	-	°C	ISO 294	80	80	80
C Injection molding-Injection velocity	-	mm/s	ISO 294	240	240	240

C These property characteristics are taken from the CAMPUS® plastics data bank and are based on the international catalogue of basic data for plastics according to ISO 10350 (Plastics Acquisition and Presentation of Comparable Single-Point Data, 1993).

Impact properties: N = non-break

This information and our technical advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided - especially that contained in our safety data and technical information sheets - and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery.

Unless specified to the contrary, the values given have been established on standardised test specimens at room temperature. The figures should be regarded as guide values only and not as binding minimum values. Kindly note that, under certain conditions, the properties can be affected to a considerable extent by the design of the mold/die, the processing conditions and the coloring.

Publisher: Business Development – Injection Molding – Technical Product Service Styrenics
Bayer MaterialScience AG,
D-51368 Leverkusen
www.bayermaterialscience.com